



Motor for 3 way valve (Type 3160)



Description



Bitron Type 3160 motor is the compact and interchangeable evolution of Type 3165. It is available with a nominal stroke of 7.5 or 10 mm with an overstroke of 3 mm specifically developed in order to self adjust the compression of the diverting valve seals during the life of the boiler.



Datasheet

- Ambient temperature** From 2° to 70°C
- Power consumption** <5 W only during operations
- Electric connections** Rast 2.5
- Enclosure protection** IP44 when coupled with Bitron special connector
- Approval(s)** ENEC

Electric scheme

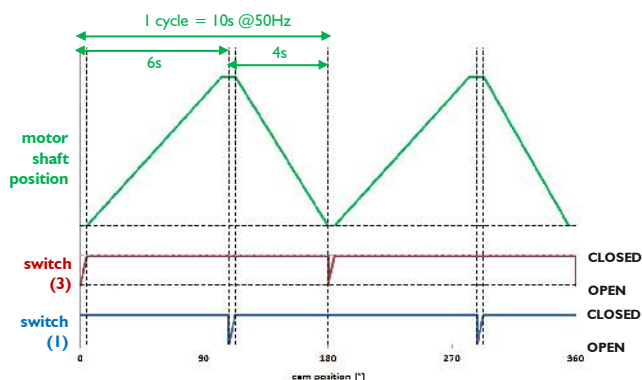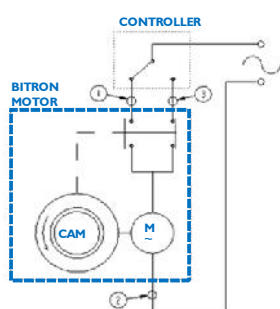

Available features

TRAVEL	7.5 mm	10 mm		
OVERSTROKE DEVICE SYSTEM	yes, with spring	no / disabled		
VOLTAGE (AC)	24V	120V	220÷240V	
MAXIMUM FORCE	75N	100N		

Overall dimensions

