

Hvac components





Motor for 3 way valve (Type 3165)



Description

Bitron Type 3165 actuator is a well known solution in the market that has been in production since 1997 and is widely used on combi wall hung boilers. It is available with a nominal stroke of 7.5 or 10 mm with an overstroke of 3 mm specifically developed in order to self adjust the compression of the diverting valve seals during the life of the boiler.

Electric scheme

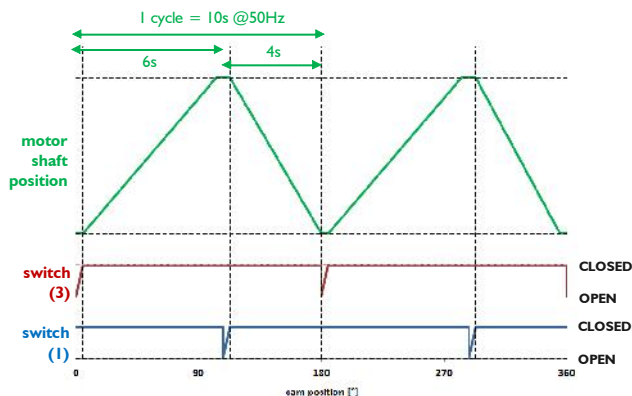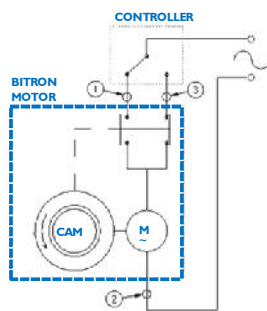

Datasheet

Ambient temperature From 2° to 70°C

Power consumption <5 W only during operations

Electric connections Faston Tabs 6.3 x 0.8 mm

Enclosure protection

IP44 when coupled with Bitron special connector

Approval(s) ENEC

Available features

TRAVEL	7.5 mm	10 mm		
OVERSTROKE DEVICE SYSTEM	yes, with spring	no / disabled		
VOLTAGE (AC)	24V	120V	220÷240V	
MAXIMUM FORCE	55N	75N		

Overall dimensions

